

FRP水槽

衛生的で耐久性に優れています

パネル式FRP水槽



SMC-8 (8t)断熱仕様



SMC-150 (150t)



SMC-240 (240t)

FRP水槽価格表(抜粋)外部補強単板仕様

	SIZE (W x L x H)	容量 (TON)	定価金額 (円)
1	2000 x 2000 x 2500	10	1,434,000
2	2000 x 5000 x 2000	20	2,268,000
3	5000 x 5000 x 2000	50	4,200,000
4	5000 x 10000 x 2000	100	7,135,000
5	5000 x 15000 x 2000	150	9,408,000
6	10000 x 10000 x 2000	200	11,368,000
7	8000 x 12500 x 2500	250	13,230,000
8	8000 x 12500 x 3000	300	14,112,000
9	10000 x 20000 x 2000	400	18,816,000
10	10000 x 25000 x 2000	500	23,520,000
11	20000 x 25000 x 2000	1000	28,616,000

※安価な内部補強タイプもございます。

※輸送費別途


FRPの物理的特性

項目	単位	耐蝕FRP製品
比重		1.4~2.3
引張り強さ	N/mm ²	120~200
引張り弾性率	N/mm ²	6,000~18,000
伸び率	%	1.0~1.8
圧縮強さ	N/mm ²	108~216
曲げ強さ	N/mm ²	120~300
曲げ弾性率	N/mm ²	6,000~12,000
熱伝導率	W/m°C	0.22
比熱	kJ/kg°C	1.2~1.3
線膨張係数	10 ⁻⁶ /°C	23
常用限界温度	°C	-40~+120

埋設型FRP水槽



SBT-4 (4t)

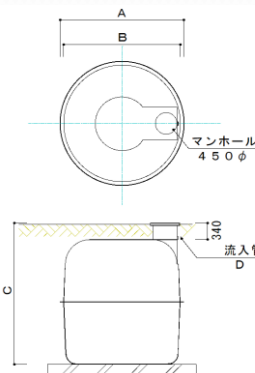

型式	寸法(mm)				容積 (m ³)
	A	B	C	D	
SBT-2	1,650	1,500	1,850	Φ100	2.0
SBT-3	1,650	1,500	2,500	Φ100	3.0
SBT-4	2,150	2,000	2,000	Φ125	4.0
SBT-5	2,150	2,000	2,400	Φ125	5.0
SBT-6	2,150	2,000	2,700	Φ125	6.0
SBT-7	2,150	2,000	3,100	Φ125	7.0
SBT-8	2,550	2,400	2,400	Φ125	8.0
SBT-9	2,550	2,400	2,650	Φ125	9.0
SBT-10	2,550	2,400	2,900	Φ125	10.0

お問合せ先 **池田テクニカル株式会社**

〒101-0047 東京都千代田区内神田三丁目9番3号

喜助神田西口ビル602号

TEL:03-5244-4785 FAX:03-5244-4786

E-mail: Tokyo.Japan@geo-max.co.jp

URL: http://ikedatechnical.hp.gogo.jp

(20220901)

販売代理店